

Now with
Higher Lift Capacity

New
65 HP 4WD ^{48.5}/_{kW}
Model 5065 E

Do Kadam Aage...



John Deere Promise
5 YEARS
WARRANTY*
— TECHNOLOGY LEADERSHIP —

Also available with
JDLINK™

...The Next Generation Tractor Technology



Tilt Steering
For operator comfort adjustable up to 25° tilt, with lock latch



EQRL
Easy hitching and usage of implement through EQRL switches



Smart Brakes
Self adjusting, self equalising, hydraulically actuated, oil immersed disc brakes



Hood Lock



Mobile Charging Point with Holder

*Zindagi ka
Best Decision!™*



JOHN DEERE

*Conditions apply

TECHNICAL SPECIFICATIONS

ENGINE

Type : 65 HP (48.5 kW), 2400 RPM,
3 Cylinder, Direct injection, Turbo
charged, Rotary FIP pump, Coolant
cooled with overflow reservoir

Air filter : Dry type, Dual element

TRANSMISSION

Type : Synchromesh Transmission- (TSS)

Clutch : Dual

Gear Box : 9 Forward + 3 Reverse

Speeds : Forward 2.1 to 30.0 kmph
Reverse 3.5 to 23.2 kmph

BRAKES

: Self adjusting, self equalising,
hydraulically actuated, oil immersed
disk brakes

HYDRAULICS

Maximum Lifting capacity : 2000 kgf

3 Point Linkage : Category II
Automatic depth & draft control
(ADDC)

STEERING

Type : Power
Tiltable upto 25° with lock latch

FRONT AXLE

Specially designed heavy duty front axle for MFWD

POWER TAKE OFF

Type : Independent , 6 splines

RPM : Dual PTO -
Standard - 540 @ 2376 ERPM
Economy - 540 @ 1705 ERPM

WHEELS AND TYRES

Front : 11.2 x 24 (0.28 x 0.61 m)

Rear : 16.9 x 30 (0.43 x 0.76 m)

FUEL TANK CAPACITY

: 68 L

ELECTRICAL SYSTEM

: 88 Ah, 12 V battery,
40 Amp. alternator,
12 V, 2.5 kW starter
motor

DIMENSIONS AND WEIGHT

Total weight : 2540 kg

Wheel base : 2050 mm

Overall length : 3590 mm

Overall width : 1880 mm

Ground clearance : 0465 mm

Turning radius with brakes : 3528 mm

ACCESSORIES*

- Ballast Weight • Canopy • Canopy holder
- Drawbar • Wagon Hitch

ADDITIONAL FEATURES

- International look
- Exhaust muffler guard
- Car type engine ON/OFF
- Radiator with overflow reservoir
- Water bottle holder
- Mobile charging point with holder


FACTORY FITTED OPTIONS

- Roll over protection structure (ROPS)
with deluxe seat and seat belt

2WD model is also available

Note: Some of the options may not be available in all combinations.
For variants please check with your nearest dealer.

New 65 HP 4WD ^{48.5 kW} Model 5065 E

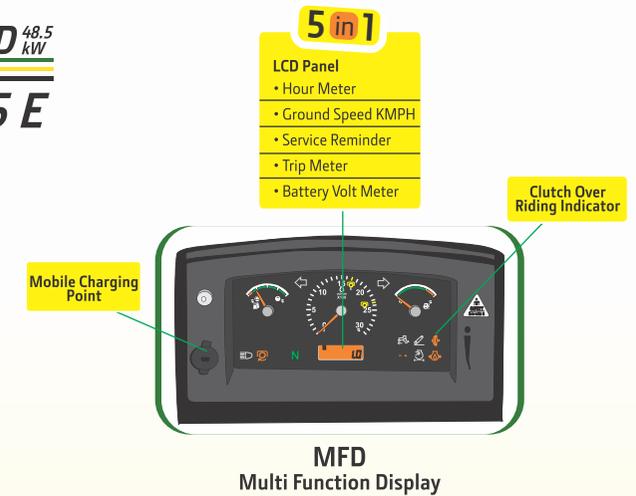

Finger guard
Enhanced safety



Single piece hood opening with gas struts
Ease in opening



PTO shield
Enhanced safety



Go Home Feature
Reach home safely in the dark



Side bar & steps
Climbing up and down the tractor is now easier



High torque reserve
More productivity

John Deere Genuine Parts

| Economical | Reliable |
| Easily available |



John Deere India Private Limited

3rd floor, Tower-15, Cybercity, Magarpatta City, Hadapsar,
Pune - 411013. Maharashtra. www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office.



- Tractors • Implements
- Harvesters • Finance



JOHN DEERE